



PCT / IB 03 / 02507

25.07.03

**INVESTOR IN PEOPLE**

BEST AVAILABLE COPY

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8000/1FO

REC'D 01 AUG 2003

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Phone

Dated 10 June 2003

**PRIORITY
DOCUMENT**

**SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)**



0213479.9
13JUN02 E725305-B D02825
P01/7706 0.00-0213479.9
The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1.	Your reference	300121.GB/DJW/ac	
2.	Patent application number <i>(The Patent Office will fill in this part)</i>	0213479.9	12 JUN 2002
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	NOKIA CORPORATION KEILALAHDENTIE 4 02150 ESPOO FINLAND	
Patents ADP number <i>(if you know it)</i>		7652217003	
If the applicant is a corporate body, give the country/state of its incorporation		FINLAND	
4.	Title of the invention	DOWNLOADABLE PROFILES FOR MOBILE TERMINALS	
5.	Name of your agent <i>(if you have one)</i> "Address for service" in the United Kingdom to which all correspondence should be sent <i>(including the postcode)</i>	PAGE WHITE & FARRER 54 DOUGHTY STREET LONDON WC1N 2LS UNITED KINGDOM	
Patents ADP number <i>(if you know it)</i>		1255003	
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and <i>(if you know it)</i> the or each application number	Country <i>(if you know it)</i>	Priority application number <i>(day / month / year)</i>
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing <i>(day / month / year)</i>
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? <i>(Answer 'Yes' if:</i> a) <i>any applicant named in part 3 is not an inventor, or</i> b) <i>there is an inventor who is not named as an applicant, or</i> c) <i>any named applicant is a corporate body</i> See note (d))	YES	

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 3

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature
PAGE WHITE & FARRER

Date
12 June 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

David J Williams 020 7831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part. The continuation sheet should be marked as such.

DOWNLOADABLE PROFILES FOR MOBILE TERMINALS

Field of the Invention

The present invention relates to downloadable profiles for mobile terminals.

Background of the Invention

Mobile terminals have become more and more important in society as a tool as well as a showcase for people all around the world. One of the more important aspects in current mobile phone design is the ability to personalise one's own phone with changeable covers, different stickers, etc. Users wish to control the image projected to other people by their possessions and this includes mobile phone terminals. This trend of mobile phone personalisation is extending into the actual software design of mobile terminals. Colour displays and programmable menus (with third party application add-ons) will lead to many more ways of customising the "look and feel" of the user interface and desktop by the end user.

History has proved that technical innovations which are targeted either to technically skilled end users or marginal groups of users will not manage to succeed in the long run. The same is true with the design and user interfaces, one of the most important factors in mobile terminals.

Current mobile terminals have so-called profiles, these are collections of user settings or preferences that the end user can automatically manage together. Such settings are, for example, ringing tone, volume of tone or maybe the silent mode of the phone. In the future profiles will become more situation dependent, for example by integrating the whereabouts of the end user.

Current mobile terminals also have end user managed "groups" which can be used to collect different people together into one entity. This group may then

have a unique ringing tone or icon which is displayed when someone from the group calls.

Profiles and subscriber groups are currently managed by the end user by a local user interface of the mobile terminal. The current system of profiles is very limiting. There exists only profiles which the end user can customise locally or download from Club Nokia-like websites. These profiles are very inflexible by nature (silent, general, etc) and only a small number of features are customable. It is not possible at present to customise existing profiles based on on-going events as described in this invention.

Customising mobile terminals is very popular, and there has been a large take-up of the limited amount of customisation which is available at present.

It is an object of the present invention to provide for mobile terminals to be further customised by the provision of improved profile information.

Summary of the Invention

According to the present invention there is provided a method of providing a profile to a mobile terminal, the method comprising: allocating a profile to a specific event; detecting an association of a mobile terminal with said event; and transmitting said profile to said mobile terminal.

Said event is preferably a location dependent event, the step of detecting an association of a mobile terminal with said event comprising detecting a location of the mobile terminal. Said event is further preferably a time dependent event, the step of detecting an association of a mobile terminal with said event further comprising detecting the location of the mobile terminal within a predetermined time period. The predetermined time period preferably corresponds to duration of the event.

The method may further comprise removing said profile from said mobile terminal responsive to termination of said event. The removing step preferably comprises transmitting a termination signal to said mobile terminal responsive to which said profile is deleted. The profile may be removed responsive to the mobile terminal leaving the location associated with an event.

The profile may include a link to event specific information. The profile may include the identity of an instant community.

The invention further provides an application server for providing an event specific profile to at least one mobile terminal, including: a first communications interface for providing a mobile network with event specific information; a second communications interface for receiving details of a mobile terminal associated with said event specific information; and a third communications interface for transmitting the event specific profile to the mobile terminal associated with said event specific information.

The event is preferably a location dependent event. The event is further preferably a time dependent event.

The event specific information is a geographical location.

The second communications interface preferably receives details of a mobile terminal located in said location. Said details include the identity of the mobile terminal. The first and second communications interface may be a fixed line communication interface. The third communication interface may be a mobile wireless communication interface. The third communication interface is preferably a GPRS or Bluetooth interface.

In a still further aspect the present invention provides a communication system for providing event specific profiles to mobile terminals, comprising: an application server associated with the event; a mobile communication network for receiving

event specific characteristics from the application server; and at least one mobile terminal for connection in said network; wherein the mobile network notifies the application server if the mobile terminal is associated with said event, and when responsive thereto the application server transmits the event specific profile to said mobile terminal.

The invention thus offers the possibility for event organisers to customise their customers mobile terminals during an event. Advantageously, the distribution of relevant information can be handled by downloadable profiles. The invention allows for the possibility of the creation of instant communities that allow users with similar interests within the event to be brought together.

Brief Description of Drawings

For a better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

Figure 1 shows an example implementation of a communication system in which the present invention may be utilised;

Figure 2 shows a signalling chart illustrating in detail an exemplary message flow in the system of Figure 1 in accordance with an illustrative embodiment of the present invention.

Description of Preferred Embodiment of the Invention

The invention is described herein with reference to a particular example, for the purpose of illustrating the operation of the invention. However the invention is not limited in its application to such an example, and one skilled in the art will appreciate, from reading the description, the broader applicability of the present invention. For the purposes of this example, it is assumed that an event provider wishes to provide an event specific profile. In this particular example, the event is location dependent. That is, the event provider is providing an event in a

and the event specific profile may be specific to the location within which the conference or party is held.

Reference is made to Figure 1 which is a block diagram illustrating an example scenario for implementing the present invention. Referring to Figure 1 there is illustrated a mobile wireless communication network (MWCN) 100, an application server 104 with three interfaces 106, 108, 110 and a mobile terminal 122. The application server 104 and interfaces 106, 108, 110 are provided, in the present example, as part of a computer system 102 associated with the event provider. Such computer system may be provided at the event provider's premises, at the location of the event, or otherwise. It will be understood from the following that the location of the application server 104 is not important to the present invention.

Figure 1 also shows the location area of the location dependent or location specific event, which is represented by the dashed circle 120. In this example, the dashed circle 120 represents a specific geographical location, within which the event provider is providing an event.

The mobile wireless communication network 100 preferably communicates with the application server 104, via one of the interfaces 112, 114, 116, either through fixed line connections or through wireless connections. The mobile terminal 122 is connected to communicate with the mobile wireless communication network 100 and the application server 104 via, for example, GPRS or a Bluetooth connections.

The event provider, as discussed above, wishes to provide an event specific profile to any mobile terminal user located in the event area 120. In order to provide this event specific profile, the event provider needs to be able to identify any mobile terminal located in the location area 120. Once any such mobile terminal is identified, the event provider downloads the event specific profile to the mobile terminal.

A preferred embodiment of the invention is now described in detail with reference to Figures 1 and 2.

In an initial step, represented by arrow 200 in Figure 2, the application server 104 transmits details of an event to the mobile wireless communication network via interface 106 on communication link 112. In this example it is assumed that the communication link 112 is a fixed land line, although the link may be a land or wireless line. It is assumed that the event provider has already registered with the provider of the mobile wireless communications network for the provision of certain services.

In the present example, the details of the event transmitted to the mobile wireless communication network are the details of the geographical location within which the event is being held. Thus the application server may provide the mobile wireless communication network with the location coordinates of the event area.

In providing the mobile wireless communication network with the details of the event, the application server 104 associated with the event provider also requests to be notified by the mobile wireless communication network 100 when any user of the network enters the event location. The mobile wireless communication network 100, or more specifically an application server associated therewith, stores the details of the event, and when any user of the network 100 becomes associated with such event, notifies the application server 104 as described in further detail hereinbelow.

Any mobile station, such as mobile station or mobile terminal 122, which is associated with and connected in the network 100 is continually in contact with the network 100. The mobile station 122 receives and transmits radio signals as represented by arrow 124 in Figure 1. The mobile wireless communication network transmits and receives radio signals as represented by arrow 118 in

calculating the position of any mobile terminal connected therein. As such, the network 100 continually monitors the location of any terminal connected thereto. This is represented in Figure 2 by the mobile station 122 transmitting network information and data signals represented by arrow 202 to the mobile wireless communication network 100.

As the mobile station 122 moves into the event area 120, the presence of the mobile station in the event area is detected by the mobile wireless communication network 100. Responsive to such detection, as represented in Figure 2, the mobile wireless communication network 100 transmits the details of the mobile station 122 to the application server 104 via the interface 108, on signal line 114 in Figure 1. Thus the application server 104 is notified of the presence of the mobile station 122 in the event area 120 via the network 100.

The capability of the mobile station 122 to receive a particular profile is preferably determined by the application server 104. This process can be done based on prestored information (e.g. a company database having details of an end user's preference), or dynamically e.g. based on the international mobile equipment identifier (IMEI) of a mobile station, provided by the network 100 in signal 204. These IMEIs are known by the network.

Once it has been determined that the mobile station is capable of receiving the event specific profile, the application server 104 uploads the "custom" or event specific profile package to the mobile station 122 as represented by signal 206 in Figure 2. The profile package download can be performed in a variety of ways, and the invention is not limited in this respect. For example the event specific profile may be transmitted via the interface 110 to the mobile station 122 over a local communication such as Bluetooth or an infra red link 117. Alternatively, the event specific profile may be transmitted by the interface 116 over a wireless radio link 116 via the network 116 as a GPRS signal.

The event specific profile package may either be automatically accepted by the mobile station 122 (based on pre-configured settings), or a dialogue requesting

acceptancy from the mobile station 122 could be shown. In the example shown in Figure 2, it is assumed that an acknowledgement from the mobile terminal is required, as represented by signal 208.

In this example it is assumed that the profile is transmitted to the mobile terminal with signal 206, and receipt of the profile acknowledged with signal 208. In an alternative, the signal 206 may be a request to transmit the profile, and the profile may be only transmitted to the mobile station responsive to the acknowledgement or acceptance of signal 208.

In one embodiment of the invention, the mobile terminal may have one or more memory "slots" to store profile packages. The mobile terminal preferably does not overwrite any profile(s) that existed before the download of the new event specific profile. After receiving the event specific profile, the end user of the mobile station 122 is preferably able to choose freely between newly downloaded profiles and any one that already existed earlier in the terminal. In an alternative, the event specific profile may be automatically enabled on download.

After the event specific profile has been installed in the mobile station, it is possible for the profile to be announced to the user. For example a specific tune may be part of the event specific profile, and this may be played to indicate to the user of the mobile station 122 that the event specific profile is loaded in the phone. Alternatively a default tone (set by the end user or the terminal vendor) can be played to inform the end user of the receipt and successful installation of the event specific profile.

The event specific profile could be an extended profile. For example, the extended profile could include:

- o Wallpaper that customises the mobile terminal's display with a suitable picture relating to the event.

- Customised welcome sound/tone, e.g. stored in AMR-format (using the RTP payload format). This tone could be played automatically or on demand, but only within the location of the event.
- Icon(s) which are added to the menu of the mobile terminal. These may link to the agenda of the event, or other back-drop information regarding the event. Such a link could be a direct external application server (e.g. a WAP page) or could be over the air downloaded MIDlet (Java application).

One extra aspect of such an event specific downloadable profile is the possibility of creating instant community groups, which could either be pre-established by the provider of the event or automatically established (by a network 100 application) based on the attendees of the event. That is, the network may establish all the users in the event area 120, and thereby establish an instant community amongst such users. The network operator may offer the establishment of such 'automatic' instant communities as part of a service to the event provider. These instant communities could also be established by the application server 104, based on the mobile stations identified thereto by the network 100.

The instant communities may be established based on either prestored preferences (such as sex, age, hobbies, etc) or based on preferences provided by a mobile terminal associated with the event. Depending on the capabilities of the mobile terminal, any established instant community groups could be 'pushed' to the mobile terminals together with a profile of the event by the application server 104. The end user of a mobile station 122 may use an instant community group to, for example, chat (e.g. via SMS; or SIP over GPRS), establish private calls possibly with special pricing, and store information for later use. This information is preferably stored in the non-volatile storage of the mobile terminal (e.g. personal phone book or (U)SIM). It may be important that a downloaded instant community group is not stored to the non-volatile memory of mobile terminals, but to the free memory reserved for temporary use.

Thus instant communities may be identified and downloaded to mobile stations in the same manner as the event specific profiles.

Referring again to Figure 2, the network 100 continually receives signals 210 including network information from the mobile station 122, which information is used to determine an updated location for the mobile station. If the network 100 detects that the mobile station 100 is no longer in the event area, then the details of such mobile station are transmitted to the application server as represented by signals 212. Responsive to notification of the mobile station leaving the event area, the application server removes the details of the mobile station from any lists established, and from any instant communities established. Preferably, the event specific profile downloaded to the mobile station that has now left the event area, is removed. This may be done by the application server requesting the network to transmit an appropriate control signal to the mobile terminal, or by the network automatically transmitting a 'profile delete' signal to the mobile terminal when the signal 212 is transmitted. Alternatively, event specific profile may be left on the user's mobile station, for the user to decide whether to delete it or not.

Similarly, it may be required to delete the event specific profile when the event terminates, for example if the conference comes to an end. Again, it may be left for a user to determine if they wish to delete the event specific profile. Referring to Figure 2, when the event terminates the application server 104 preferably notifies the network 100 by transmitting an appropriate signal 214.

The network 100 may then transmit a signal 216 to the mobile station to delete the event specific profile, and the mobile station 122 may transmit an acknowledgement signal 218 back. However, no such specific deletion of the event specific profile may be required.

If the event ends the application server 104 may transmit signals to the mobile

than transmitting a signal through the network 100. However any terminals no longer in the local area would have to be communicated with through the network 100.

The initiation of the deletion of the event specific profile preferably deletes any other information downloaded therewith, thus freeing the memory of the mobile terminal for further use and other profiles. It may be preferable to remove both the IC groups and the downloaded profile. This may be done automatically by the mobile terminal (e.g. profile and IC group could both have a "time to live" parameter which is controlled by profile/IC group manager applications in a terminal site). Alternatively the application server 104 may be used to trigger the offload of profiles and IC groups (e.g. via GPRS connection) based on, for example, time of day or notification of a location update from the serving core network 100.

The present invention has been described herein by way of reference to a particular exemplary embodiment. It will be understood that the invention is not limited to the applications described herein. In particular, the invention is more broadly applicable than the specific examples given. The invention, and the scope of protection afforded, is defined by the appended claims.

CLAIMS:

1. A method of providing a profile to a mobile terminal, the method comprising:

allocating a profile to a specific event;
detecting an association of a mobile terminal with said event; and
transmitting said profile to said mobile terminal.

2. A method according to claim 1, wherein said event is a location dependent event, the step of detecting an association of a mobile terminal with said event comprising detecting a location of the mobile terminal.

3. A method according to claim 2, wherein said event is further a time dependent event, the step of detecting an association of a mobile terminal with said event further comprising detecting the location of the mobile terminal within a predetermined time period.

4. A method according to claim 3, wherein the predetermined time period corresponds to duration of the event.

5. A method according to any preceding claim, further comprising removing said profile from said mobile terminal responsive to termination of said event.

6. A method according to claim 5, wherein said removing step comprises transmitting a termination signal to said mobile terminal responsive to which said profile is deleted.

7. A method according to claim 6, wherein the profile is removed responsive to the mobile terminal leaving the location associated with an event.

8. A method according to any preceding claim wherein the profile includes a

9. A method according to any preceding claim wherein the profile includes the identity of an instant community.
10. An application server for providing an event specific profile to at least one mobile terminal, including:
 - a first communications interface for providing a mobile network with event specific information;
 - a second communications interface for receiving details of a mobile terminal associated with said event specific information;
 - and a third communications interface for transmitting the event specific profile to the mobile terminal associated with said event specific information.
11. An application server according to claim 10, wherein the event is a location dependent event.
12. An application server according to claim 11 wherein the event is further a time dependent event.
13. An application server according to claim 11 or claim 12, wherein the event specific information is a geographical location.
14. An application server according to any one of claims 10 to 13, wherein the second communications interface receives details of a mobile terminal located in said location
15. An application server according to claim 14, wherein said details include the identity of the mobile terminal.

16. An application server according to any one of claims 10 to 15, wherein the first and second communications interface are a fixed line communication interface.

17. An application server according to any one of claims 10 to 16, wherein the third communication interface is a mobile wireless communication interface.

18. An application server according to claim 17, wherein the third communication interface is a GPRS or Bluetooth interface.

19. A communication system for providing event specific profiles to mobile terminals, comprising:

- an application server associated with the event;

- a mobile communication network for receiving event specific characteristics from the application server; and

- at least one mobile terminal for connection in said network;

wherein the mobile network notifies the application server if the mobile terminal is associated with said event, and when responsive thereto the application server transmits the event specific profile to said mobile terminal.

Abstract

There is disclosed a method of providing a profile to a mobile terminal, the method comprising: allocating a profile to a specific event; detecting an association of a mobile terminal with said event; and transmitting said profile to said mobile terminal.

[Figure 2]

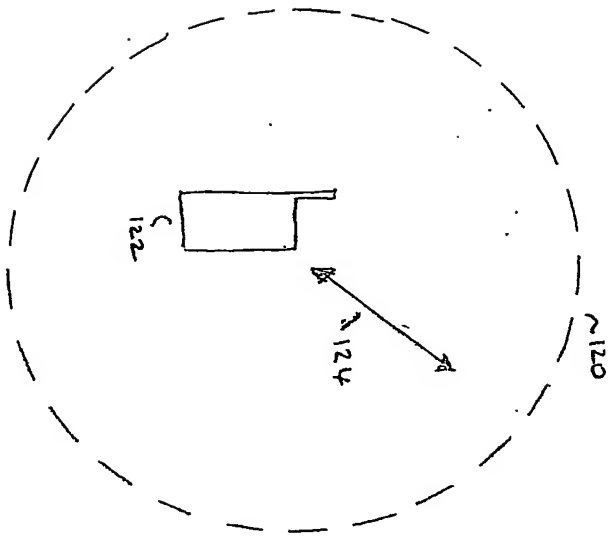
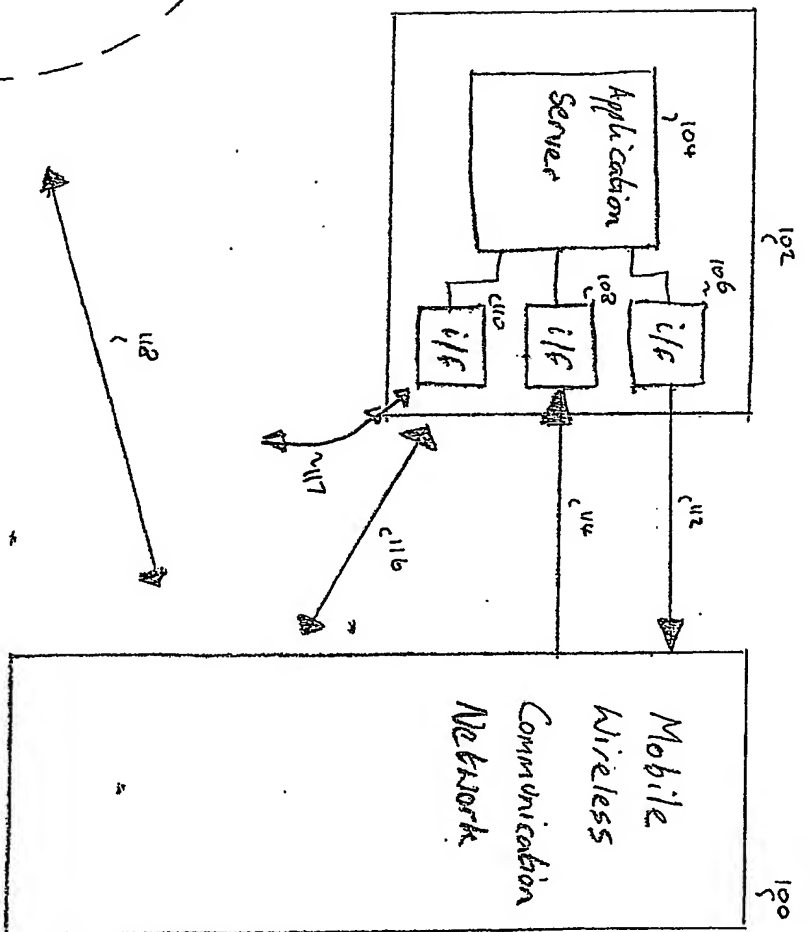


Figure 1

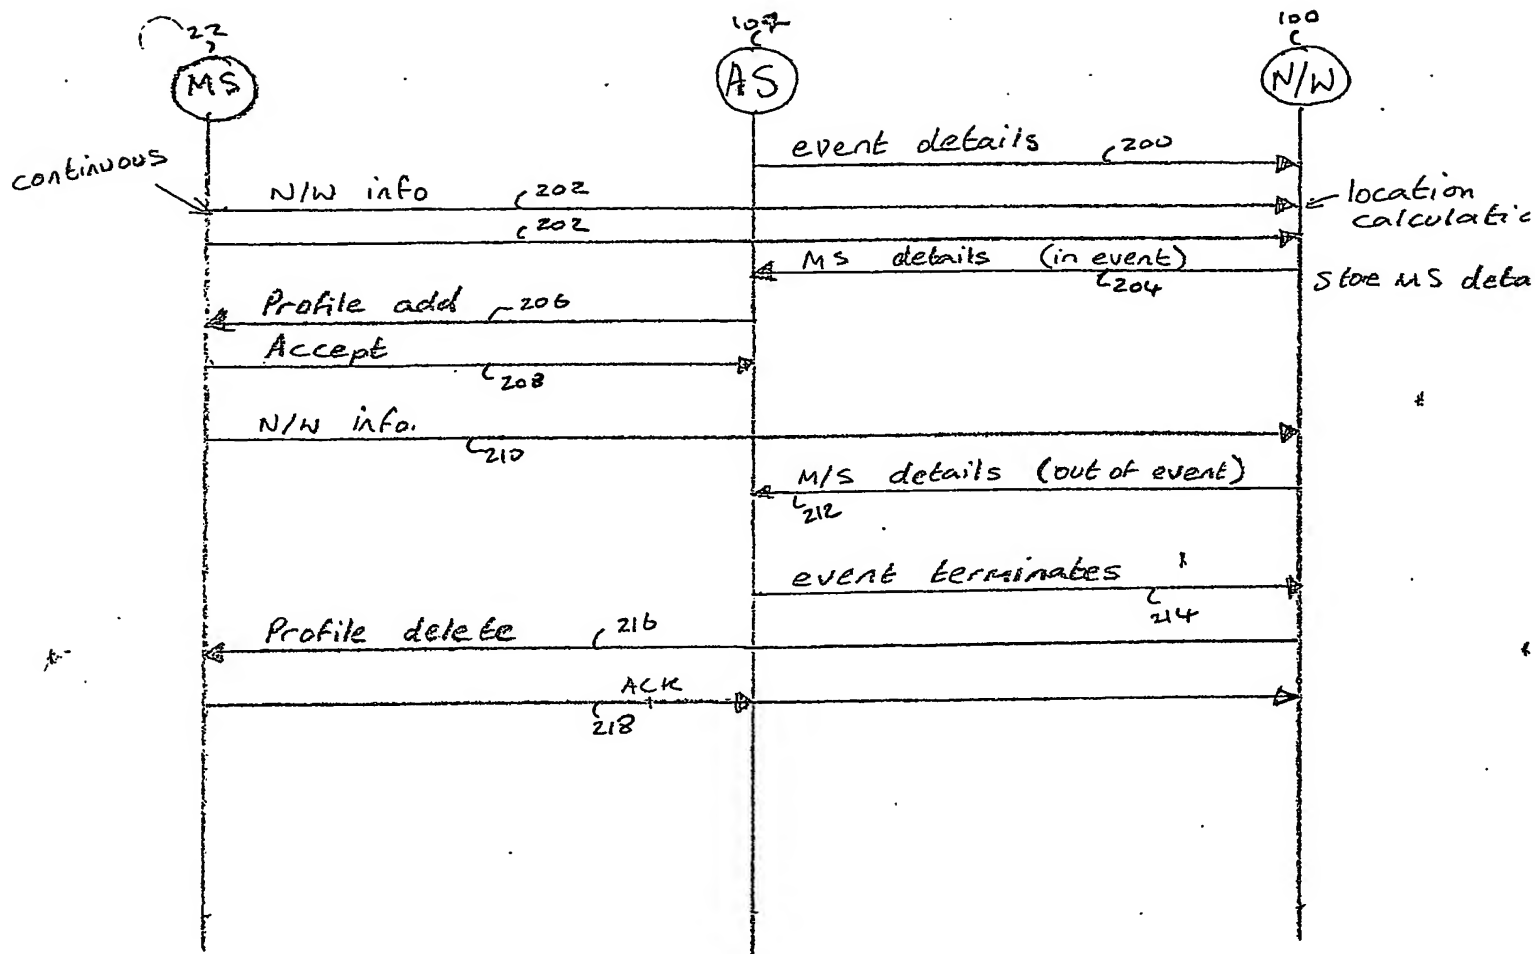


FIGURE 2.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: _____**

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.